


Univers	Professional
Type	Verticality
Category	Mobile fall arresters
Subcategory	Mobile fall arresters



ASAP®


An essential component in your fall protection system, rely on the ASAP for everyday work at height applications. During normal use when moving along the rope, the device trails freely without the need for manual operation. In the event of a fall or uncontrolled descent (exceeding two meters per second), the device blocks the rope and stops the user. Choose the energy absorber length that best suits your needs, the ASAP'SORBER 20 or 40, to comfortably work closer or further from the rope.




The ASAP mobile fall arrester follows the user as they move along the rope, trailing freely without the need for manual operation.



In the event of a fall or uncontrolled descent that exceeds two meters per second, the blocking system engages and the device stops the fall.



Using the ASAP mobile fall arrester with the ASAP'SORBER 20 minimizes fall distance. Using it with the ASAP'SORBER 40 keeps the rope at a distance to free up workspace.

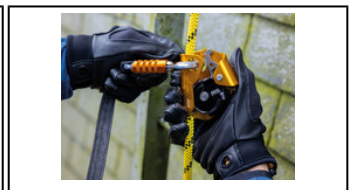

The ASAP is compact and easy to use, even with gloves.

Short Description Compact mobile fall arrester for rope

Selling Points

- Mobile fall arrester for rope:
 - Stops falls and uncontrolled descents that exceed two meters per second
 - Blocks on the rope even if grabbed during the fall
 - Works on vertical, horizontal, or angled rope
 - Compatible with ropes 10 to 13 mm in diameter
 - Toothed wheel is effective on a variety of rope conditions, such as frozen or dirty ropes
- Compact and easy to use:
 - Easy to install and remove at any point on the rope
 - Moves up or down the rope without any manual operation
- Use in combination with:
 - ASAP'SORBER 20 or 40 energy absorber, for use with a person weighing up to 140 kg
 - ASAP'SORBER AXESS energy absorber, for use in two-person rescue scenarios, up to 250 kg
- The ASAP can be used as a primary belay device in a fall-arrest system or as a back-up belay in a rope access system
- The ASAP is also available in pre-assembled kits for a ready-to-use solution, with ASAP'SORBER 20 or 40 or ASAP'SORBER AXESS energy absorbers and OK TRIACT-LOCK or Bm'D TRIACT-LOCK connectors

Specification

- Rope compatibility: 10 to 13 mm
- Certification(s): CE EN 12841 type A, CE EN 353-2, ANSI Z359.15, GB/T 24537, XF 494 : FZL-Z-Q10/13
- CE EN 12841 type A when used with an ASAP'SORBER 20/40 or ASAP'SORBER AXESS energy absorber, and a CE EN 1891 type A 10 to 13 mm rope and an OK TRIACT-LOCK carabiner
- CE EN 353-2 when used with an ASAP'SORBER 20/40 or ASAP'SORBER AXESS energy absorber, an AXIS 11 mm rope with two sewn terminations and an OK TRIACT-LOCK carabiner
- ANSI Z359.15 when used with an ASAP'SORBER 20/40 or ASAP'SORBER AXESS energy absorber, a BEAM 11 mm rope with two sewn terminations and a Bm'D TRIACT-LOCK carabiner
- Weight: 190g
- Material(s): Aluminum, stainless steel, nylon

Specifications by reference

Reference(s)	B070AB00
Made in	FR
Guarantee	3 years
Inner Pack Count	1
Quantity Per Box	10
EAN	3342540850439

Accessory(ies)	CAPTIV
----------------	--------

Related product(s)	ASAP'SORBER OK Bm'D ASAP'SORBER AXESS
--------------------	--